LiuGong



Engine	Cummins L9T3-200A1
Rated Power	200 kW @ 2,200 rpm
Blade Width	4,270 mm
Maximum Speed	44 km/h
Draw Bar Pull	130 kN
Operating Weight	20,850 kg

4260D MOTOR GRADER

TOUGH WORLD. TOUGH EQUIPMENT.

4260D SPECIFICATIONS >>>

ENGINE	
Emission Regulation	EPA Tier 3 / EU Stage III
Manufacturer	Cummins
Model	L9T3-200A1
Rated Power	200 kW @ 2,200 rpm
Maximum Torque	1245 N·m @ 1400 rpm
Number of Cylinders	6
Aspiration	Turbo & air-to-air intercooled

TRANSMISSION	
Transmission Type	Power shift
Torque Converter	Single stage, three elements
Maximum Travel Speed, fwd	44 km/h
Maximum Travel Speed, rev	32 km/h
Number of Speeds, fwd	6
Number of Speeds, rev	3

AXLES	
Differential Type	Limited slip standard
Final Drive Type	Chain drive
Axle Oscillation	±16°
Front Axle, Wheel Lean Angle	Left / right 18°

STEERING	
Steering Configuration	Load sensing steering
Steering Relief Pressure	16.7 MPa
Minimum Turning Radius	7,500 mm
Steering Angle	±45°
Frame Articulation Angle	±27°

BRAKES	
Service Brake Type	Wet brake
Service Brake Location	Rear axle

TIRES	
Tire Size	20.5R25

HYDRAULIC SYSTEM	
Main Pump Type	Piston
Main Relief Pressure	21 MPa
Main Pump Flow	220 L/min

WORKING CAPACITIES	
Maximum Draw Pull	130 kN
Cutting Pressure	9,950 kg

TANDEM DRIVE PERFORMANCE	
Height	670 mm
Width	215 mm
Center Distance	1,696 mm


MOLDBOARD PERFORMANCE	
Bank Cut Angle	28~71°
Moldboard Lift Above Ground	570 mm
Moldboard Side Shift, left/right	575 / 825 mm
Maximum Sloping Angle	90°
Cutting Depth	838 mm
Circle Rotation	360°
Circle Diameter	1,576 mm
Circle Thickness	150 mm


DIMENSIONS	
Wheelbase	6,550 mm
Overall Length	9,680 mm
Overall Width	2,860 mm
Overall Height with Cab	3,530 mm
Clearance under Front Axle	545 mm
Moldboard Standard Length	4,270 mm
Moldboard Standard Thickness	25 mm
Moldboard Standard Height	645 mm

OPERATING WEIGHTS	
Operating Weight	20,850 kg

SERVICE CAPACITIES	
Fuel Tank	400 L
Engine Oil	21 L
Cooling System	38 L
Hydraulic System	125 L
Transmission and Torque Converter	27 L
Tandems, laft, centre, right	90, 30, 90 L

OPTIONAL EQUIPMENT
Ripper
Front Dozer
Automatic Leveling System
Air Suspension Seat
Oil Bath Air Filter

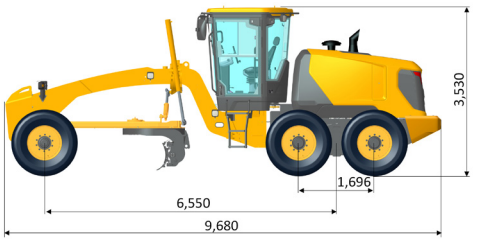

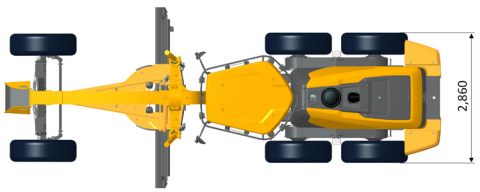

Unit : mm

Guangxi Liugong Machinery Co., Ltd.
No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 3886124 E: overseas@liugong.com
www.liugong.com

01/2026 Designed by LiuGong
Replace the previous versions of 07/2025

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.