9200F SPECIFICATIONS >>>


ENGINE	
Emission Regulation	CN III
Manufacturer	Cummins
Model	QSK38
Rated Power	810 kW (1,086 hp / 1,101 ps) @ 1,800 rpm
Net Power	810 kW (1,086 hp / 1,101 ps) @ 1,800 rpm
Peak Torque	4,869 N·m @ 1, 350rpm
Number of Cylinders	12
Displacement	37.7 L

UNDERCARRIAGE	
Shoe Width	800 mm
Number of Shoes per Side	49
Number of Upper Rollers per Side	3
Number of Bottom Rollers per Side	8


TRACK DRIVE	
Maximum Travel Speed	2.8 km/h
Drawbar Pull	1,100 kN

HYDRAULIC SYSTEM	
Main Pumps Total Flow	1,947 L/min
Relief Pressure, main	30 MPa
Relief Pressure, boost	33 MPa

DIMENSION	
A. Overall Length	17,236 mm
B. Overall Height	7,062 mm
C. Track Gauge	4,600 mm
D. Width over tracks	5,400 mm
E. Length to Center of Rollers	7,470 mm
F. Track Length	5,780 mm
G. Overall Width of Upper Structure	7,364 mm
H. Tail Swing Radius	6,115 mm
I. Counterweight Ground Clearance	2,008 mm
J. Overall Height of Cab	7,029 mm
K. Min. Ground Clearance	799 mm
L. Track Shoe Width	800 mm

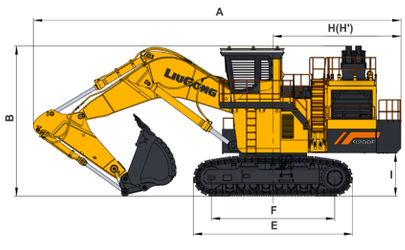



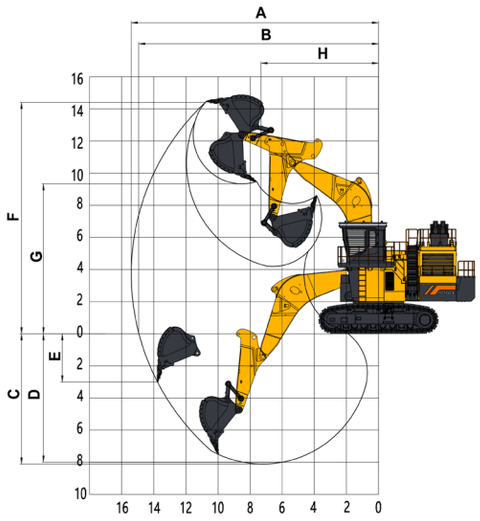

BOOM & ARM	
Boom Length	8,300 mm
Arm Length	3,600 mm

BUCKET PERFORMANCE	
Bucket Heaped Capacity (Referenced)	10 / 12 / 14 m^3

SERVICE CAPACITIES	
Fuel Tank	4,000 L
Engine Oil	166 L
Cooling System	400 L
Hydraulic Reservoir	1,050 L
Hydraulic System Total	2,000 L

SWING SYSTEM	
Swing Speed	4.8 r/min

WORKING RANGE	
A. Max. Digging Reach	15,360 mm
B. Max. Digging Reach on Ground	14,912 mm
C. Max. Digging Depth	8,120 mm
D. Max. Digging Depth, 2.44 m (8') Level	7,996 mm
E. Max. Vertical Wall Digging Dept	3,001 mm
F. Max. Cutting Height	14,480 mm
G. Max. Dumping Height	9,330 mm
H. Min. Front Swing Radius	7,328 mm
Bucket Digging Force (ISO)	705 kN
Stick Digging Force (ISO)	630 kN

Guangxi Liugong Machinery Co., Ltd.
No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 3886124 E: overseas@liugong.com
www.liugong.com

03/2025 Designed by LiuGong

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area. Engine power kW is converted to metric hp in this file (1 kW=1.34 hp).

LIUGONG

TOUGH WORLD. TOUGH EQUIPMENT.

Guangxi LiuGong Machinery Co., Ltd.
No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 388 6124 E: overseas@liugong.com
www.liugong.com

Like and follow us:

LG-9200F-CN III-032025-ENG

The LiuGong series of logos herein, including but not limited to word marks, device marks, letter of alphabet marks and combination marks, as the registered trademarks of Guangxi LiuGong Group Co., Ltd. are used by Guangxi LiuGong Machinery Co., Ltd. with legal permission, and shall not be used without permission. Specifications and designs are subject to change without notice. Illustrations and pictures may include optional equipment and may not include all standard equipment. Equipment and options varies by regional availability.